


TECHNICAL DATA	UNIT.	HPW-8 V	HPW-8 P	HPW-10 V	HPW-10 P
DRUM					
Load capacity 1:9 / 1:10	Kg	9/8	9/8	11/10	11/10
Volume	l	80	80	100	100
Diameter	mm	532	532	532	532
Depth	mm	360	360	450	450
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	50/ 1.250	50/ 1.250	50/ 1.250	50/ 1.250
G Factor	-	450	450	450	450
Self-service version	-	SI	SI	SI	SI
Double drain	-	No	No	No	No
Weighing system / tilting system	-	No	No	No	No
DOOR					
Height center door / Height base door	mm	537/280	537/280	537/280	537/280
Diameter	mm	373	373	373	373
DYNAMIC FORCE					
Static Load	KN	0,14	0,14	0,15	0,15
Maximum Dynamic load	KN	0,5	0,5	0,6	0,6
Vertical maximum load	KN	0,64	0,64	0,75	0,75
Max revolutions	r.p.m.	1.250	1.250	1.250	1.250
Frequency of dynamic load	-	18,33	18,33	18,33	18,33
POWER					
Motor	kW	0,75	0,75	0,75	0,75
Electric heating	kW	6	6	6	6
Hot water heating	kW	0	0	0	0
Max. power electric model	kW	6,75	6,75	6,75	6,75
Max. power HW model	kW	0,75	0,75	0,75	0,75
Max. power steam	kW	No	No	No	No
CONNECTIONS					
Water inlet	inch	3/4"	3/4"	3/4"	3/4"
Drain	mm/inch	2"	1" (Bomba)	2"	1" (Bomba)
DIMENSIONS / PACKING DIMENSIONS					
Width / width	mm	680/710	680/710	680/710	680/710
Depth / depth	mm	698/832	698/832	772/832	772/832
Height / height	mm	1.040/1.130	1.040/1.130	1.040/1.130	1.040/1.130
Net weight / Gross weight	Kg	140/150	140/150	150/160	150/160

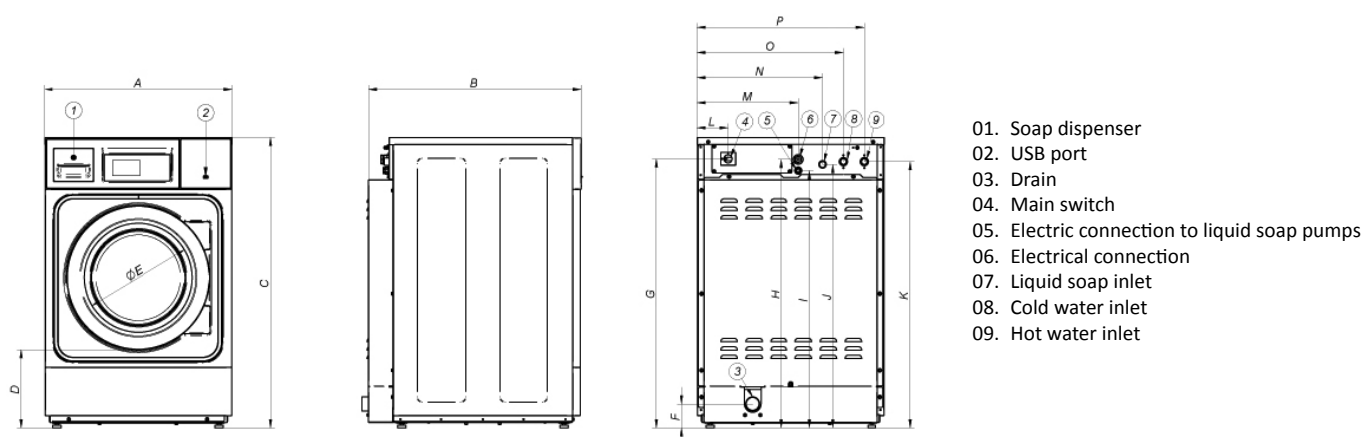

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
HPW-8 V	680	698	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
HPW-8 P	680	698	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-
HPW-10 V	680	772	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
HPW-10 P	680	772	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-