


TECHNICAL DATA	UNIT.	CY2660	CY3360
<b>GENERAL DETAILS</b>			
Theoretical production (45%) humidity	Kg/h	75-105	110-140
Ø Roll	mm	600	600
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.050	1.050
Working speed	mt/min	3-10	3-10
Control type	-	Touch	Touch
<b>POWER</b>			
Heating power (electric model)	kW	60	60
Total electric power (electric model)	kW	61,9	61,9
Heating power (gas model)	kW	65	82
Total electric power (gas model)	kW	1,9	1,9
Heating power (steam model)	kW	55	75
Total electric power (steam model)	kW	1,9	1,9
<b>CONNECTIONS</b>			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
<b>DIMENSIONS / PACKAGING DIMENSIONS</b>			
Width / Width	mm	3.674/3.760	4.374/4.460
Depth / Depth	mm	1.445/1.540	1.445/1.540
Height / Height	mm	1.810/2.060	1.810/2.060
Weight / Weight	Kg	1.800/2.050	2.050/2.350
Volume	m3	9,61/11,93	11,44/14,15
<b>OTHERS</b>			
No. Fume outlet	N°	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	NI/h	5.000	5.000
Sound Level	dB	70	70

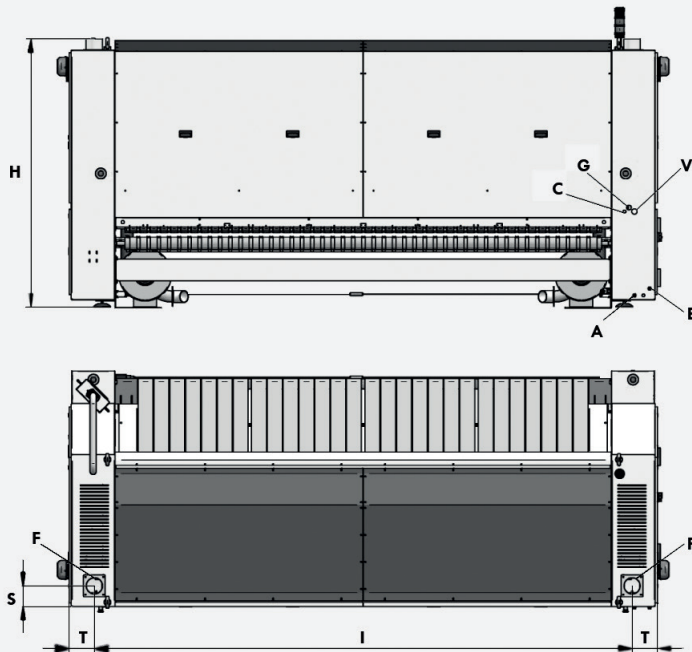

- A. Compressed air inlet
- C. Condensation discharge (steam heating)
- E. Electrical connection
- F. Fumes discharge connection
- G. Gas inlet (gas heating)
- V. Steam inlet (steam heating)

	H	I	T	S	A	C	E	F	G	V
CY2660	1.800	3.242	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"
CY3360	1.800	3.942	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"