


TECHNICAL DATA	UNIT.	CY2680	CY3380
GENERAL DETAILS			
Theoretical production (45%) humidity	Kg/h	140-175	180-220
Ø Roll	mm	800	800
Working width	mm	2.600	3.300
Height floor-feeding	mm	970	970
Working speed	mt/min	3-13	3-13
Control type	-	Touch	Touch
POWER			
Heating power (electric model)	kW	75	75
Total electric power (electric model)	kW	77,2	77,2
Heating power (gas model)	kW	89	127
Total electric power (gas model)	kW	2,2	2,2
Heating power (steam model)	kW	85	110
Total electric power (steam model)	kW	2,2	2,2
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKAGING DIMENSIONS			
Width / Width	mm	3.786/3.870	4.486/4.570
Depth / Depth	mm	1.770/1.860	1.770/1.860
Height / Height	mm	1.980/2.230	1.980/2.230
Weight / Weight	Kg	2.350/2.700	2.550/3.050
Volume	m3	13,27/16,05	15,72/18,96
OTHERS			
No. Fume outlet	N°	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	NI/h	5.000	5.000
Sound Level	dB	70	70

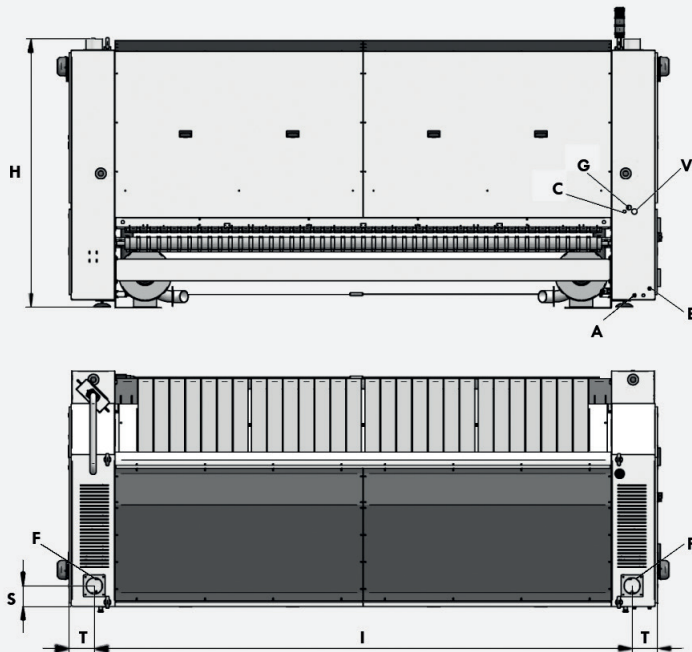

- A. Compressed air inlet
- C. Condensation discharge (steam heating)
- E. Electrical connection
- F. Fumes discharge connection
- G. Gas inlet (gas heating)
- V. Steam inlet (steam heating)

	H	I	T	S	A	C	E	F	G	V
CY2680	1.966	3.242	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"
CY3380	1.966	3.942	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"