



TECHNICAL DATA	UNIT.	SE2660	SE3360
GENERAL DETAILS			
Theoretical production (45%) humidity	Kg/h	75-105	110-140
Ø Roll	mm	600	600
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.100	1.100
Working speed	mt/min	3-10	3-10
Control type	-	Touch	Touch
Programmes	N°	20	20
Side stacker	N°	Yes	Yes
FOLDING			
1 lane - Primary fold	N°	1-2	1-2
1 lane - Cross fold	N°	1-2-3	1-2-3
2 lanes - Primary fold	N°	1-2	1-2
2 lanes - Cross fold	N°	1-2	1-2
POWER			
Heating power (electric model)	kW	60	60
Total electric power (electric model)	kW	63,1	63,1
Heating power (gas model)	kW	65	82
Total electric power (gas model)	kW	3,1	3,1
Heating power (steam model)	kW	55	75
Total electric power (steam model)	kW	3,1	3,1
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKAGING DIMENSIONS			
Width / Width	mm	3.718 / 3.800	4.418 / 4.500
Depth / Depth	mm	2.209 / 2.300	2.209 / 2.300
Height / Height	mm	1.810 / 2.060	1.810 / 2.060
Weight / Weight	Kg	2.686 / 3.050	3.080 / 3.680
Volume	m3	14,87 / 18,00	17,66 / 21,32
OTHERS			
No. Fume outlet	N°	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	Nl/h	15.000	15.000
Sound Level	dB	70	70

Compact Stacker
(roll-off)



Stacker





Compact Stacker

	L	P
SE2660	4.309	2.774
SE3360	5.009	2.774

Stacker

	L	P
SE2660	5.070	2.863
SE3360	5.770	2.863

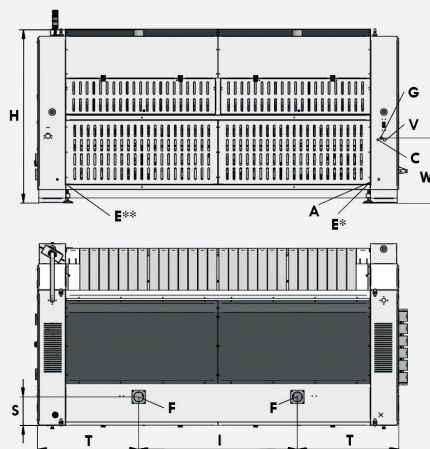

- A. Compressed air inlet
- C. Condensation discharge (steam heating)
- E. Electrical connection
- F. Fumes discharge connection
- G. Gas inlet (gas heating)
- V. Steam inlet (steam heating)

- * Linen right exit
- ** Linen left exit

	H	I	T	S	A	C	E	F	G	V	W
SE2660 (mm)	1.867	1.196	1.208	478	Ø 12	1/2"	5G4	Ø 120	1"	1"	765
SE3360 (mm)	1.867	1.896	1.208	478	Ø 12	1/2"	5G4	Ø 120	1"	1"	765