



TECHNICAL DATA	UNIT.	SE2680	SE3380
GENERAL DETAILS			
Theoretical production (45%) humidity	Kg/h	140-175	180-220
Ø Roll	mm	800	800
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.110	1.110
Working speed	mt/min	3-13	3-13
Control type	-	Touch	Touch
Programmes	Nº	20	20
Side stacker	Nº	Yes	Yes
FOLDING			
1 lane - Primary fold	Nº	1-2	1-2
1 lane - Cross fold	Nº	1-2-3	1-2-3
2 lanes - Primary fold	Nº	1-2	1-2
2 lanes - Cross fold	Nº	1-2	1-2
POWER			
Heating power (electric model)	kW	75	75
Total electric power (electric model)	kW	78,5	78,5
Heating power (gas model)	kW	89	127
Total electric power (gas model)	kW	3,5	3,5
Heating power (steam model)	kW	85	110
Total electric power (steam model)	kW	3,5	3,5
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKAGING DIMENSIONS			
Width / Width	mm	3.718 / 3.800	4.418 / 4.500
Depth / Depth	mm	2.209 / 2.300	2.209 / 2.300
Height / Height	mm	2.080 / 2.330	2.080 / 2.330
Weight / Weight	Kg	3.350 / 3.750	3.730 / 4.330
Volume	m3	17,08 / 20,36	20,30 / 24,12
OTHERS			
No. Fume outlet	Nº	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	Nl/h	19.000	19.000
Sound Level	dB	70	70

Compact Stacker
(roll-off)



Stacker





Compact Stacker

	L	P
SE2680	4.309	2.774
SE3380	5.009	2.774

Stacker

	L	P
SE2680	5.070	2.863
SE3380	5.770	2.863

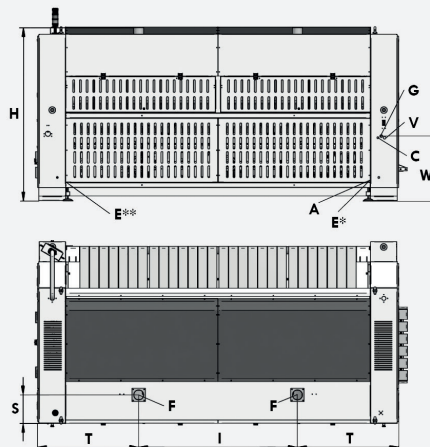

- A. Compressed air inlet
- C. Condensation discharge (steam heating)
- E. Electrical connection
- F. Fumes discharge connection
- G. Gas inlet (gas heating)
- V. Steam inlet (steam heating)

- * Linen right exit
- ** Linen left exit

	H	I	T	S	A	C	E	F	G	V	W
SE2680 (mm)	2.067	1.196	1.208	340	Ø 12	1/2"	5G4	Ø 120	1"	1"	765
SE3380 (mm)	2.067	1.896	1.208	340	Ø 12	1/2"	5G4	Ø 120	1"	1"	765