


TECHNICAL DATA	UNIT.	DLS-27 TOUCH	DLS-36 TOUCH			
<b>DRUM</b>						
Load capacity 1:9 / 1:10	Kg	28/25	39/35			
Volume	l	250	350			
Diameter	mm	770	860			
Depth	mm	530	602			
<b>GENERAL DETAILS</b>						
Washing speed / Spining speed	r.p.m.	48/481	45/455			
G Factor	-	100	100			
Maximum force transmitted	KN	3,4 ±0,6	4,73 ±0,8			
Frequency-dynamic force	Hz	8,01	7,58			
Self-service version	-	Yes	Yes			
Double drain	-	Opt	Opt			
Option 8mm holes drum	-	Yes	Yes			
<b>DOOR</b>						
Height center door / Height door	mm	700/440	735/375			
Diameter	mm	373	560			
<b>POWER</b>						
Motor	kW	2,2	3			
Heating (Electric model)	kW	18	21			
Max. power (Electric model)	kW	18,75	22			
Max. power (steam and hot water)	kW	2,2	3			
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	
Tension 230V- I + N + T	Nº x mm2 / A	3 x 25 / 100A	3 x 1,5 / 16A	3 x 25 / 100A	3 x 1,5 / 16A	
Tension 230V- III + T	Nº x mm2 / A	4 x 10 / 50A	-	4 x 16 / 63A	-	
Tension 400V- III + N + T	Nº x mm2 / A	5 x 4 / 32A	-	5 x 6 / 40A	-	
Steam inlet (Steam mod.)	inch	3/4"		3/4"		
Maximum steam consumption (Steam mod.)	Kg/h	15		18		
Water inlet	inch	3/4"		3/4"		
Water main pressure	Kgs/cm <sup>2</sup>	2-4		2-4		
Maximum water consumption*	Lit/h	164,8		199,6		
Drain	mm/inch	3"		3"		
Drainage capacity	Lit/min	200		200		
<b>DIMENSIONS / PACKING DIMENSIONS</b>						
Width / Width	mm	884/950			979/1.070	
Depth / Depth	mm	965/1150			1.066/1.260	
Height / Height	mm	1.307/1.550			1.411/1.660	
Net weight / Gross weight	kg	360/394			468/510	

\* N°20 Program, 75% load

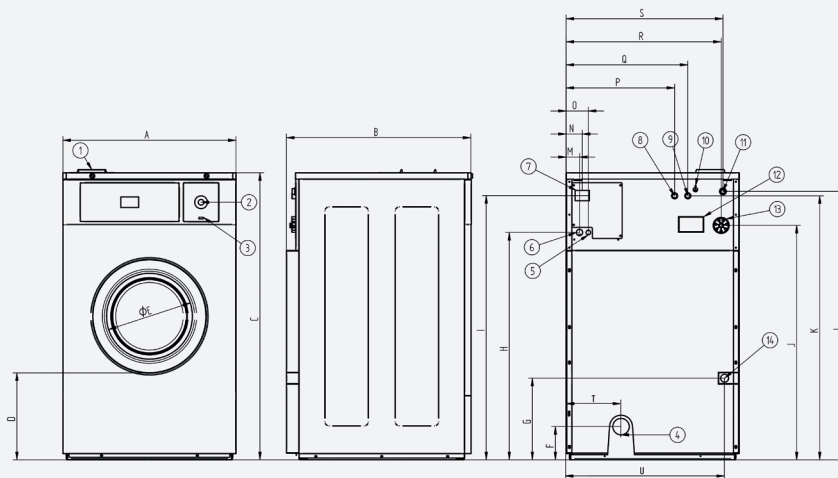

- 01. Soap dispenser
- 02. Emergency stop
- 03. Usb port
- 04. Drain
- 05. Electric connection to liquid soap pumps
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Ground connection
- 11. Cold water inlet
- 12. Blur output / water overload
- 13. Liquid soap connection
- 14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
DLS-27	884	1.011	1.307	440	373	138	543	1.035	1.203	1.053	1.218	1.218	61	74	101	410	490	769	810	268	820
DLS-36	979	1.066	1.411	366	560	143	625	1.139	1.307	1.142	1.322	1.322	61	74	101	506	586	864	906	262	917